

PSO-1 Stealth

Weatherproof socket outlet box



Enclosures

Material	DMC (Dough Moulding Compound)
Operating Temperature	-50°C to + 200° C
Glow Wire Capability / Flammability	960° / UL94 V0
Expected UV Life (Direct Exposure)	GRP Flap 25 years + , Plastic Flap 3 - 5 years exposed
IP Level	IP66 without cable & IP54 with cable
Security Level	Level 1 without pad-lock and Level 3 with pad-lock

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index



Surface Mounted

Flush Mounted

Flush Mounted

Surface Mounted

Part Number	Description	H (mm)	W (mm)	D (mm)
040-607	PSO-1 Stealth with GRP flap	176	132	94
040-608	PSO-1 Stealth with PC flap	176	132	94

Note:

- Plastic flap is not suitable for areas with direct sunlight.
- PSO-1 Stealth comes fitted with an Allbro socket.

- **Flush/Surface Mounted**
- **Easy & Simple to install**
- **Available with Plastic/GRP flap**
- **Pad-lockable**



Pad-lockable

Stealth range fits pad-lock size 262,
*Size may vary according to make.

Installation:


Flush Mounted:



Cut the PSO-1 Stealth on the provided cut lines



Cut the PSO-2 Stealth on



Once optional cut-section is removed, PSO-1 Stealth / PSO-2 Stealth fits between two bricks making installation simple and easy.


Surface Mounted:

***NO CUTTING REQUIRED FOR SURFACE MOUNTING**



Place the PSO-1 Stealth/ PSO-2 Stealth in the desired area and fix on wall using 6mm Nail in anchor screws. This modern weatherproof plugbox leaves you with a modern finish PLUS all the benefits of the original plug box you know and have trusted for 40 years

Note: South Africa's new plug and socket standard, SANS 164-2 or ZA Plug, has become mandatory for new installations. This means that any new buildings erected must incorporate electrical sockets that conform to the new standard .

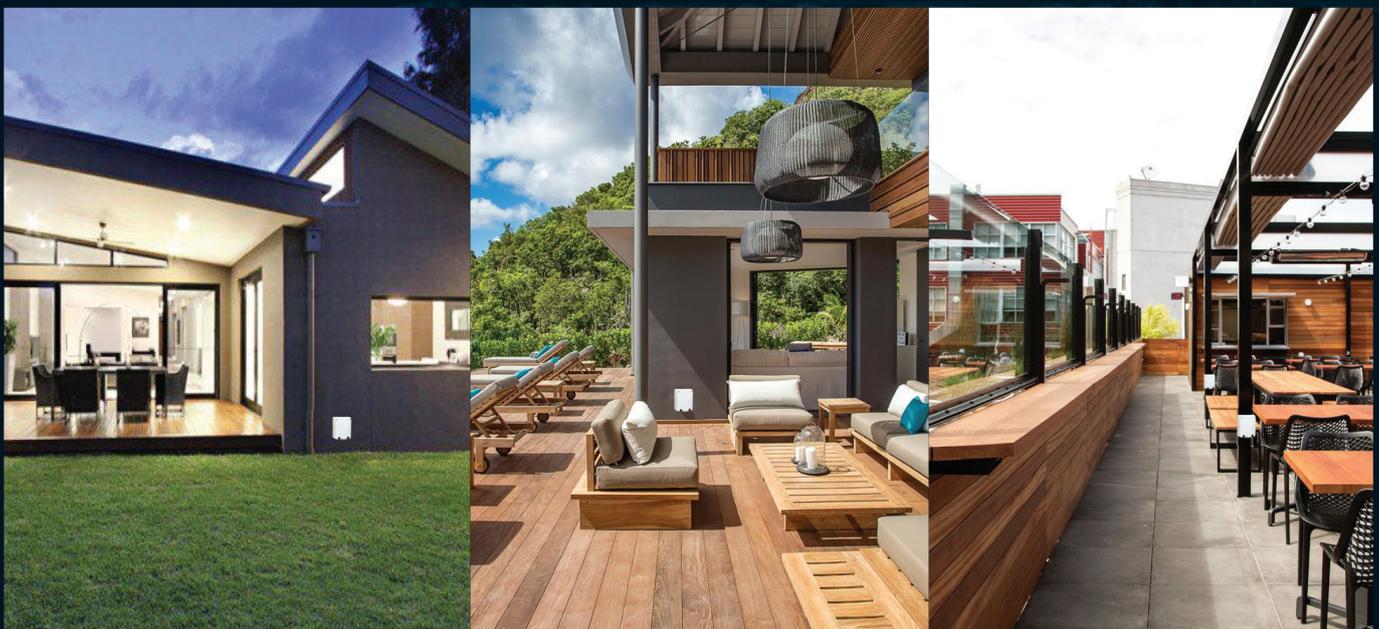

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index